




12W G24D LED Commercial Bulbs

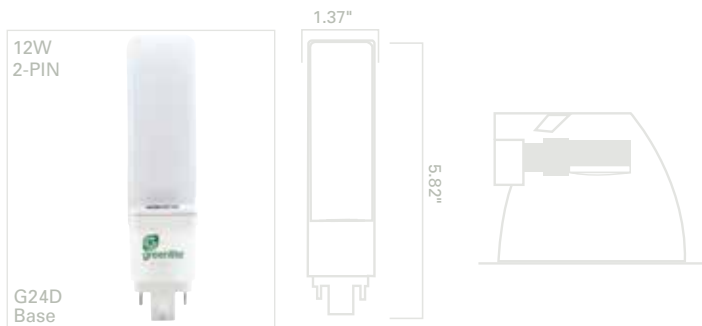

- 26W CFL G24D Base Replacement Using Only 12W
- Installs in seconds
- CFL bulbs in downlights, sconces and other fixtures with 2-PIN G24D

These energy-saving LED lamps are quick, easy and safe to install into existing CFL fixtures without any extra effort or re-wiring.

- ‡Compatible to magnetic ballast (26W).
- Voltage **120V-277V**.
- No lumens lost over life of product
- 5-year warranty



This PL lamp has an adjustable base that can be rotated to **180°** to fit any socket configuration. After it is installed, easily rotate the lamp to adjust the maximum light output.



Plug & Play or Bypass
PL Direct Replacement

UPC	Description	Lumens	Life (Hours)	CFL PLC Replacement	Beam Angle	M.O.L.	CCT	CRI
40151	12W LED 2-PIN G24D Base 120V-277V	1200	50,000	26W	140°	5.82"	3500K	80
40164	12W LED 2-PIN G24D Base 120V-277V	1200	50,000	26W	140°	5.82"	4000K	80

‡ For use with 26W magnetic ballast.
May not be compatible with all magnetic ballast. Call for more information.

Certifications LM-80, TM-21, IES.

Pending Certifications: LM-79, LDL.

•The lumen performance may vary depending on the type of ballast available, number of lamps and type of fixture.

*Above data may be subject to change.

***Not intended to be used in enclosed fixtures.

**Not for use where directly exposed to weather or water.

